


2.5 x 5 cm Offset | Decoration

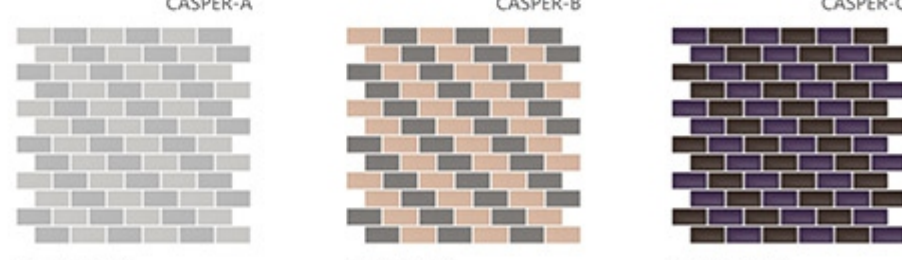

2.5x5 cm | 1"x2"

| | | |
|--|---|---|
| <p>Aligned</p> <p>Sheet Size : 30.84 x 30.42 cm Mosaic Pcs. : 12 x 6 = 72 Joint Gap : ~ 2.30 mm Sheet Coverage Area : 0.094 m²</p> | <p>Offset</p> <p>Sheet Size : 30.84 x 30.42 cm Mosaic Pcs. : 12 x 6 = 72 Joint Gap : ~ 2.30 mm Sheet Coverage Area : 0.094 m²</p> | <p>Herringbone</p> <p>Sheet Size : 29.08 x 28.68 cm Mosaic Pcs. : 8 x 8 = 64 Joint Gap : ~ 2.30 mm Sheet Coverage Area : 0.083 m²</p> |
| <p>Pinwheel</p> <p>Sheet Size : 30.00 x 30.00 cm Mosaic Size % : 2.5 x 5 cm - 88% + 2.5 x 2.5 cm - 12% Joint Gap : ~ 1.6 mm Sheet Coverage Area : 0.090 m²</p> | | |

Colour & Look

| | |
|------------------------------------|---------------------------------------|
| <p>Silk Silk effect</p> | <p>Velvet Gloss effect</p> |
|------------------------------------|---------------------------------------|

Elegance, Functionality & Freedom of design

PICCOLO porcelain mosaics are a cultivation of a feeling, creation of expectation & excitement, a promise of quality & service-an emotional response to architectural needs with different looks and colours.

PICCOLO gives you the flexibility to select, mix and merge - items, techniques, sizes, looks and colours. Such combinations create infinite and unique design possibilities to suit your taste and ambience.

Through PICCOLO range, designers have freedom to explore 1000+ options with numerous sizes, looks and colours.

KEY FEATURES

| | |
|---|--|
| <p>DURABILITY</p> <p><0.5 % water absorption</p> | <p>STRENGTH</p> <p>8 mm thickness for better strength</p> |
| <p>LOOKS</p> <p>S Silk (Silk effect) V Velvet (Gloss effect) C Crepe (Crackle effect) M Moire (Cloudy effect) D Denim (Shading effect) L Linen (Grip effect) B Batik (Print effect)</p> | <p>COLOURS</p> |
| <p>SAFETY</p> <p>Grip on floor for better grip</p> | <p>ADAPTABILITY</p> <p>Easy to fix on curved surfaces</p> |
| <p>MOSAIC ACCESSORIES</p> <p>For better finish.</p> | <p>INNOVATIVE ASSEMBLY</p> <p>State-of-the-art Polyurethane link assembling through Robot</p> |

| TECHNICAL CHARACTERISTICS & TEST DATA | | |
|---------------------------------------|--------------------------------------|--------------------------|
| | WATER ABSORPTION | ISO 10545-3 ≤ 0.5% |
| | BREAKING STRENGTH | ISO 10545-4 Passes |
| | MODULUS OF RUPTURE | ISO 10545-4 Passes |
| | RESISTANCE TO GLAZE ABRASION | ISO 10545-7 Resistant |
| | RESISTANCE TO THERMAL SHOCK | ISO 10545-9 Resistant |
| | RESISTANCE TO GLAZE CRACKING | ISO 10545-11 Resistant |
| | RESISTANT TO FROST | ISO 10545-12 Resistant |
| | RESISTANCE TO CHEMICAL ATTACK | ISO 10545-13 Resistant |
| | RESISTANCE TO STAIN | ISO 10545-14 Resistant |
| | LIGHT AND COLOUR FASTNESS | DIN 51094 / SS301 Passes |

Mosaic colours shown here are purely indicative, tonal variation is an inherent characteristics of high temperature fired product.

