

2.5 x 5 cm Pinwheel | Decoration



101-S, 120-S



104-S, 272-S




221-S, 128-S



226-S, 225-S


2.5x5 cm | 1"x2 "

Aligned

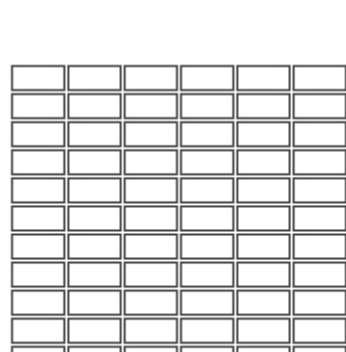

Sheet Size : 30.84 x 30.42 cm
Mosaic Pcs. : 12 x 6 = 72
Joint Gap : ~ 2.30 mm
Sheet Coverage Area : 0.094 m²

Offset

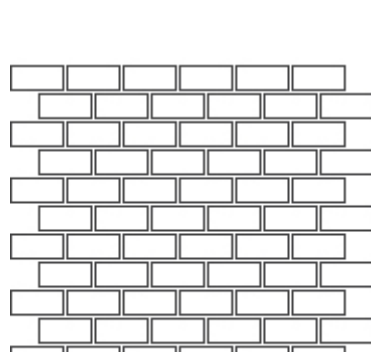


Sheet Size : 30.84 x 30.42 cm
Mosaic Pcs. : 12 x 6 = 72
Joint Gap : ~ 2.30 mm
Sheet Coverage Area : 0.094 m²

Herringbone




Sheet Size : 29.08 x 28.68 cm
Mosaic Pcs. : 8 x 8 = 64
Joint Gap : ~ 2.30 mm
Sheet Coverage Area : 0.083 m²

Pinwheel

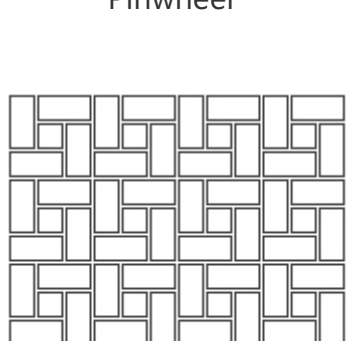

Sheet Size : 30.00 x 30.00 cm
Mosaic Size % : 2.5 x 5 cm - 88%
+ 2.5 x 2.5 cm - 12%
Joint Gap : ~ 1.6 mm
Sheet Coverage Area : 0.090 m²

Colour & Look

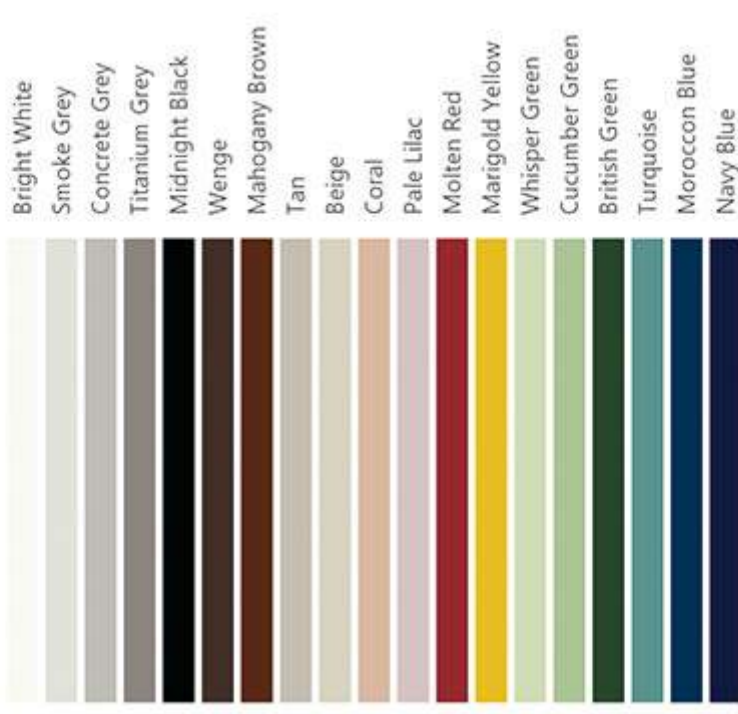

Silk
Silk effect



Velvet
Gloss effect



Elegance, Functionality & Freedom of design

PICCOLO porcelain mosaics are a cultivation of a feeling, creation of expectation & excitement, a promise of quality & service-an emotional response to architectural needs with different looks and colours.

PICCOLO gives you the flexibility to select, mix and merge - items, techniques, sizes, looks and colours. Such combinations create infinite and unique design possibilities to suit your taste and ambience.

Through PICCOLO range, designers have freedom to explore 1000+ options with numerous sizes, looks and colours.

KEY FEATURES	
DURABILITY	<p>≤0.5% water absorption</p>
STRENGTH	<p>8 mm thickness for better strength</p>
LOOKS	<p>S Silk (Silk effect)</p> <p>V Velvet (Gloss effect)</p> <p>C Crepe (Crackle effect)</p> <p>M Moire (Cloudy effect)</p> <p>D Denim (Shading effect)</p> <p>L Linen (Grip effect)</p> <p>B Batik (Print effect)</p>
COLOURS	
SAFETY	<p>Grip on floor for better grip</p>
ADAPTABILITY	<p>Easy to fix on curved surfaces</p>
MOSAIC ACCESSORIES	<p>For better finish.</p>
INNOVATIVE ASSEMBLING	<p>State-of-the-art Polyurethane link assembling through Robot</p>

TECHNICAL CHARACTERISTICS & TEST DATA			
	WATER ABSORPTION	ISO 10545-3	≤ 0.5%
	BREAKING STRENGTH	ISO 10545-4	Passes
	MODULUS OF RUPTURE	ISO 10545-4	Passes
	RESISTANCE TO GLAZE ABRASION	ISO 10545-7	Resistant
	RESISTANCE TO THERMAL SHOCK	ISO 10545-9	Resistant
	RESISTANCE TO GLAZE CRACKING	ISO 10545-11	Resistant
	RESISTANT TO FROST	ISO 10545-12	Resistant
	RESISTANCE TO CHEMICAL ATTACK	ISO 10545-13	Resistant
	RESISTANCE TO STAIN	ISO 10545-14	Resistant
	LIGHT AND COLOUR FASTNESS	DIN 51094 / SS301	Passes

Mosaic colours shown here are purely indicative, tonal variation is an inherent characteristic of high temperature fired product.

