




2.5 x 7.5 cm Aligned | Plain | Silk




181-S



163-S




254-S



211-S


2.5x7.5 cm | 1"x3"

Aligned

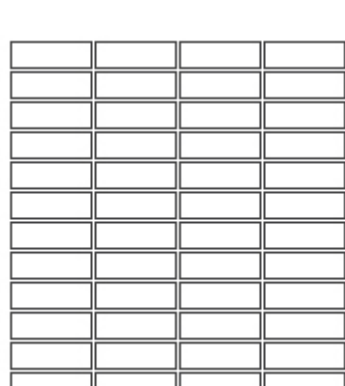

Sheet Size : 31.26 x 30.42 cm
Mosaic Pcs. : 12 x 4 = 48
Joint Gap : ~ 2.65 mm
Sheet Coverage Area : 0.095 m²

Offset

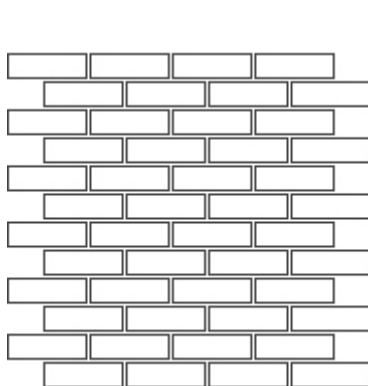


Sheet Size : 31.26 x 30.42 cm
Mosaic Pcs. : 12 x 4 = 48
Joint Gap : ~ 2.65 mm
Sheet Coverage Area : 0.095 m²

Herringbone




Sheet Size : 32.27 x 29.47 cm
Mosaic Pcs. : 8 x 6 = 48
Joint Gap : ~ 2.65 mm
Sheet Coverage Area : 0.095 m²

Basketweave

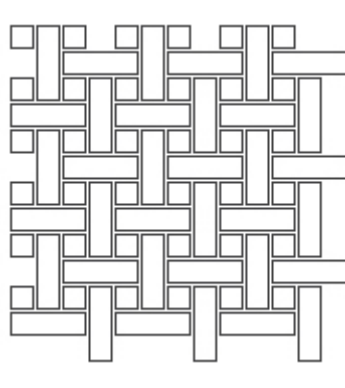

Sheet Size : 30.00 x 30.00 cm
Mosaic Size % : 2.5 x 7.5 cm - 75%
+ 2.5 x 2.5 cm - 25%
Joint Gap : ~ 1.6 mm
Sheet Coverage Area : 0.090 m²

Colour & Look

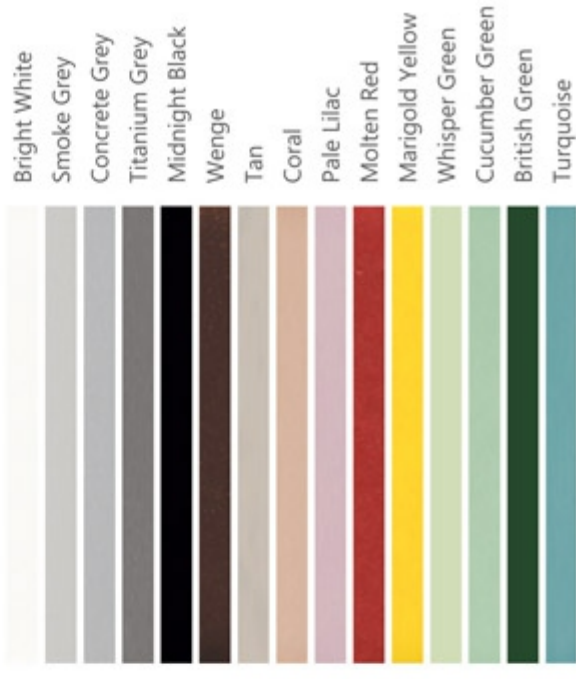

Silk
Satin effect



Velvet
Gloss effect



Elegance, Functionality & Freedom of design

PICCOLO porcelain mosaics are a cultivation of a feeling, creation of expectation & excitement, a promise of quality & service—an emotional response to architectural needs with different looks and colours.

PICCOLO gives you the flexibility to select, mix and merge - items, techniques, sizes, looks and colours. Such combinations create infinite and unique design possibilities to suit your taste and ambience.

Through PICCOLO range, designers have freedom to explore 1000+ options with numerous sizes, looks and colours.

KEY FEATURES

DURABILITY	<0.5% water absorption	STRENGTH	8 mm thickness for better strength
LOOKS	S Silk Satin effect	V Velvet Gloss effect	C Crepe Crackle effect
	M Moire Cloudy effect	D Denim Shading effect	L Linen Grip effect
			B Batik Print effect
COLOURS			
SAFETY	Grip on floor for better grip	ADAPTABILITY	Easy to fix on curved surfaces
MOSAIC ACCESSORIES	For better finish.	INNOVATIVE ASSEMBLING	State-of-the-art Polyurethane Link assembling through Robot

TECHNICAL CHARACTERISTICS & TEST DATA			
	WATER ABSORPTION	ISO 10545-3	≤ 0.5%
	BREAKING STRENGTH	ISO 10545-4	Passes
	MODULUS OF RUPTURE	ISO 10545-4	Passes
	RESISTANCE TO GLAZE ABRASION	ISO 10545-7	Resistant
	RESISTANCE TO THERMAL SHOCK	ISO 10545-9	Resistant
	RESISTANCE TO GLAZE CRACKING	ISO 10545-11	Resistant
	RESISTANT TO FROST	ISO 10545-12	Resistant
	RESISTANCE TO CHEMICAL ATTACK	ISO 10545-13	Resistant
	RESISTANCE TO STAIN	ISO 10545-14	Resistant
	LIGHT AND COLOUR FASTNESS	DIN 51094 / SS301	Passes

Mosaic colours shown here are purely indicative. Tonal variation is an inherent characteristics of high temperature fired product.

