





5x10 cm | 2"x4"

Aligned

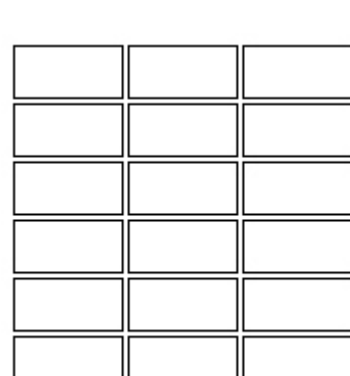


Sheet Size : 30.84 x 30.42 cm
Mosaic Pcs. : 6 x 3 = 18
Joint Gap : ~ 3.0 mm
Sheet Coverage Area : 0.094 m²

Offset

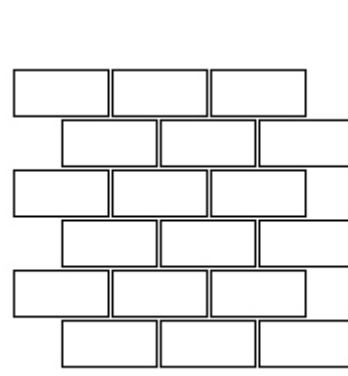


Sheet Size : 30.84 x 30.42 cm
Mosaic Pcs. : 6 x 3 = 18
Joint Gap : ~ 3.0 mm
Sheet Coverage Area : 0.094 m²

Herringbone

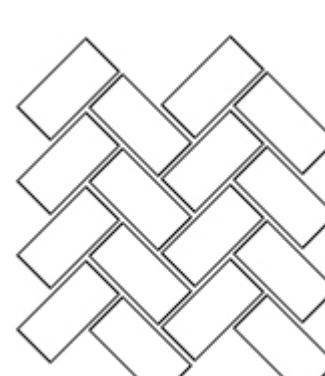

Sheet Size : 29.08 x 28.68 cm
Mosaic Pcs. : 4 x 4 = 16
Joint Gap : ~ 3.0 mm
Sheet Coverage Area : 0.083 m²

Basketweave

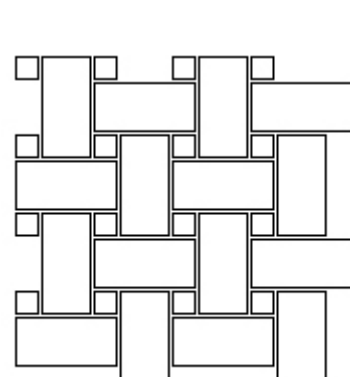

Sheet Size : 30.00 x 30.00 cm
Mosaic Size % : 5 x 10 cm - 88% + 2.5 x 2.5 cm - 12%
Joint Gap : ~ 1.6 mm
Sheet Coverage Area : 0.090 m²

Colour & Look

Elegance, Functionality & Freedom of design

PICCOLO porcelain mosaics are a cultivation of a feeling, creation of expectation & excitement, a promise of quality & service-an emotional response to architectural needs with different looks and colours.

PICCOLO gives you the flexibility to select, mix and merge - items, techniques, sizes, looks and colours. Such combinations create infinite and unique design possibilities to suit your taste and ambience.

Through PICCOLO range, designers have freedom to explore 1000+ options with numerous sizes, looks and colours.

KEY FEATURES

- DURABILITY**: $\le 0.5\%$ water absorption
- STRENGTH**: 8 mm thickness for better strength
- LOOKS**: S (Silk - Smooth effect), V (Velvet - Gloss effect), C (Crepe - Crackle effect), M (Moire - Cloudy effect), D (Denim - Shading effect), L (Linen - Grip effect), B (Batik - Print effect)
- COLOURS**: A wide spectrum of color swatches.
- SAFETY**: Grip on floor for better grip
- ADAPTABILITY**: Easy to fix on curved surfaces
- MOSAIC ACCESSORIES**: For better finish.
- INNOVATIVE ASSEMBLING**: State-of-art Polyurethane link assembling through Robot (LinkTec)

TECHNICAL CHARACTERISTICS & TEST DATA		
	WATER ABSORPTION	ISO 10545-3 $\leq 0.5\%$
	BREAKING STRENGTH	ISO 10545-4 Passes
	MODULUS OF RUPTURE	ISO 10545-4 Passes
	RESISTANCE TO GLAZE ABRASION	ISO 10545-7 Resistant
	RESISTANCE TO THERMAL SHOCK	ISO 10545-9 Resistant
	RESISTANCE TO GLAZE CRACKING	ISO 10545-11 Resistant
	RESISTANT TO FROST	ISO 10545-12 Resistant
	RESISTANCE TO CHEMICAL ATTACK	ISO 10545-13 Resistant
	RESISTANCE TO STAIN	ISO 10545-14 Resistant
	LIGHT AND COLOUR FASTNESS	DIN 51094 / SS301 Passes

Mosaic colours shown here are purely indicative, tonal variation is an inherent characteristics of high temperature fired product.

