


## 5 x 10 cm Metro | 2" x 4" Metro

### Aligned



Sheet Size : 30.84 x 30.42 cm  
Mosaic Pcs. : 6 x 3 = 18  
Joint Gap : ~ 3.00 mm  
Sheet Coverage Area : 0.094 m<sup>2</sup>

### Offset

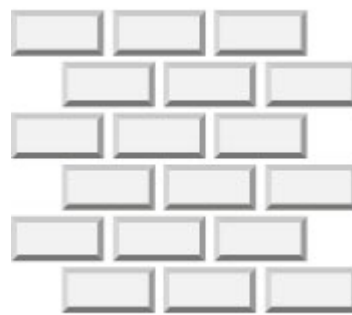

Sheet Size : 30.84 x 30.42 cm  
Mosaic Pcs. : 6 x 3 = 18  
Joint Gap : ~ 3.00 mm  
Sheet Coverage Area : 0.094 m<sup>2</sup>

## Colour & Look



### Velvet



## Elegance, Functionality & Freedom of design

PICCOLO porcelain mosaics are a cultivation of a feeling, creation of expectation & excitement, a promise of quality & service-an emotional response to architectural needs with different looks and colours.

PICCOLO gives you the flexibility to select, mix and merge - items, techniques, sizes, looks and colours. Such combinations create infinite and unique design possibilities to suit your taste and ambience.

Through PICCOLO range, designers have freedom to explore 1000+ options with numerous sizes, looks and colours.

### KEY FEATURES

<p><b>DURABILITY</b></p> <p>≤0.5 % water absorption</p>	<p><b>STRENGTH</b></p> <p>8 mm thickness for better strength</p>							
<p><b>LOOKS</b></p> <table border="0"> <tr> <td><b>S</b> Silk Satin effect</td> <td><b>V</b> Velvet Gloss effect</td> <td><b>C</b> Crepe Crackle effect</td> <td><b>M</b> Moire Cloudy effect</td> <td><b>D</b> Denim Shading effect</td> <td><b>L</b> Linen Grip effect</td> <td><b>B</b> Batik Print effect</td> </tr> </table>		<b>S</b> Silk Satin effect	<b>V</b> Velvet Gloss effect	<b>C</b> Crepe Crackle effect	<b>M</b> Moire Cloudy effect	<b>D</b> Denim Shading effect	<b>L</b> Linen Grip effect	<b>B</b> Batik Print effect
<b>S</b> Silk Satin effect	<b>V</b> Velvet Gloss effect	<b>C</b> Crepe Crackle effect	<b>M</b> Moire Cloudy effect	<b>D</b> Denim Shading effect	<b>L</b> Linen Grip effect	<b>B</b> Batik Print effect		
<p><b>COLOURS</b></p>								
<p><b>SAFETY</b></p> <p>Grip on floor for better grip</p>	<p><b>ADAPTABILITY</b></p> <p>Easy to fix on curved surfaces</p>							
<p><b>MOSAIC ACCESSORIES</b></p> <p>For better finish.</p>	<p><b>INNOVATIVE ASSEMBLING</b></p> <p>State-of-the-art Polyurethane link assembling through Robot</p>							

TECHNICAL CHARACTERISTICS & TEST DATA			
	<b>WATER ABSORPTION</b>	ISO 10545-3	≤ 0.5%
	<b>BREAKING STRENGTH</b>	ISO 10545-4	Passes
	<b>MODULUS OF RUPTURE</b>	ISO 10545-4	Passes
	<b>RESISTANCE TO GLAZE ABRASION</b>	ISO 10545-7	Resistant
	<b>RESISTANCE TO THERMAL SHOCK</b>	ISO 10545-9	Resistant
	<b>RESISTANCE TO GLAZE CRACKING</b>	ISO 10545-11	Resistant
	<b>RESISTANT TO FROST</b>	ISO 10545-12	Resistant
	<b>RESISTANCE TO CHEMICAL ATTACK</b>	ISO 10545-13	Resistant
	<b>RESISTANCE TO STAIN</b>	ISO 10545-14	Resistant
	<b>LIGHT AND COLOUR FASTNESS</b>	DIN 51094 / SS301	Passes

Mosaic colours shown here are purely indicative, tonal variation is an inherent characteristics of high temperature fired product.

