


Linen
Grip effect

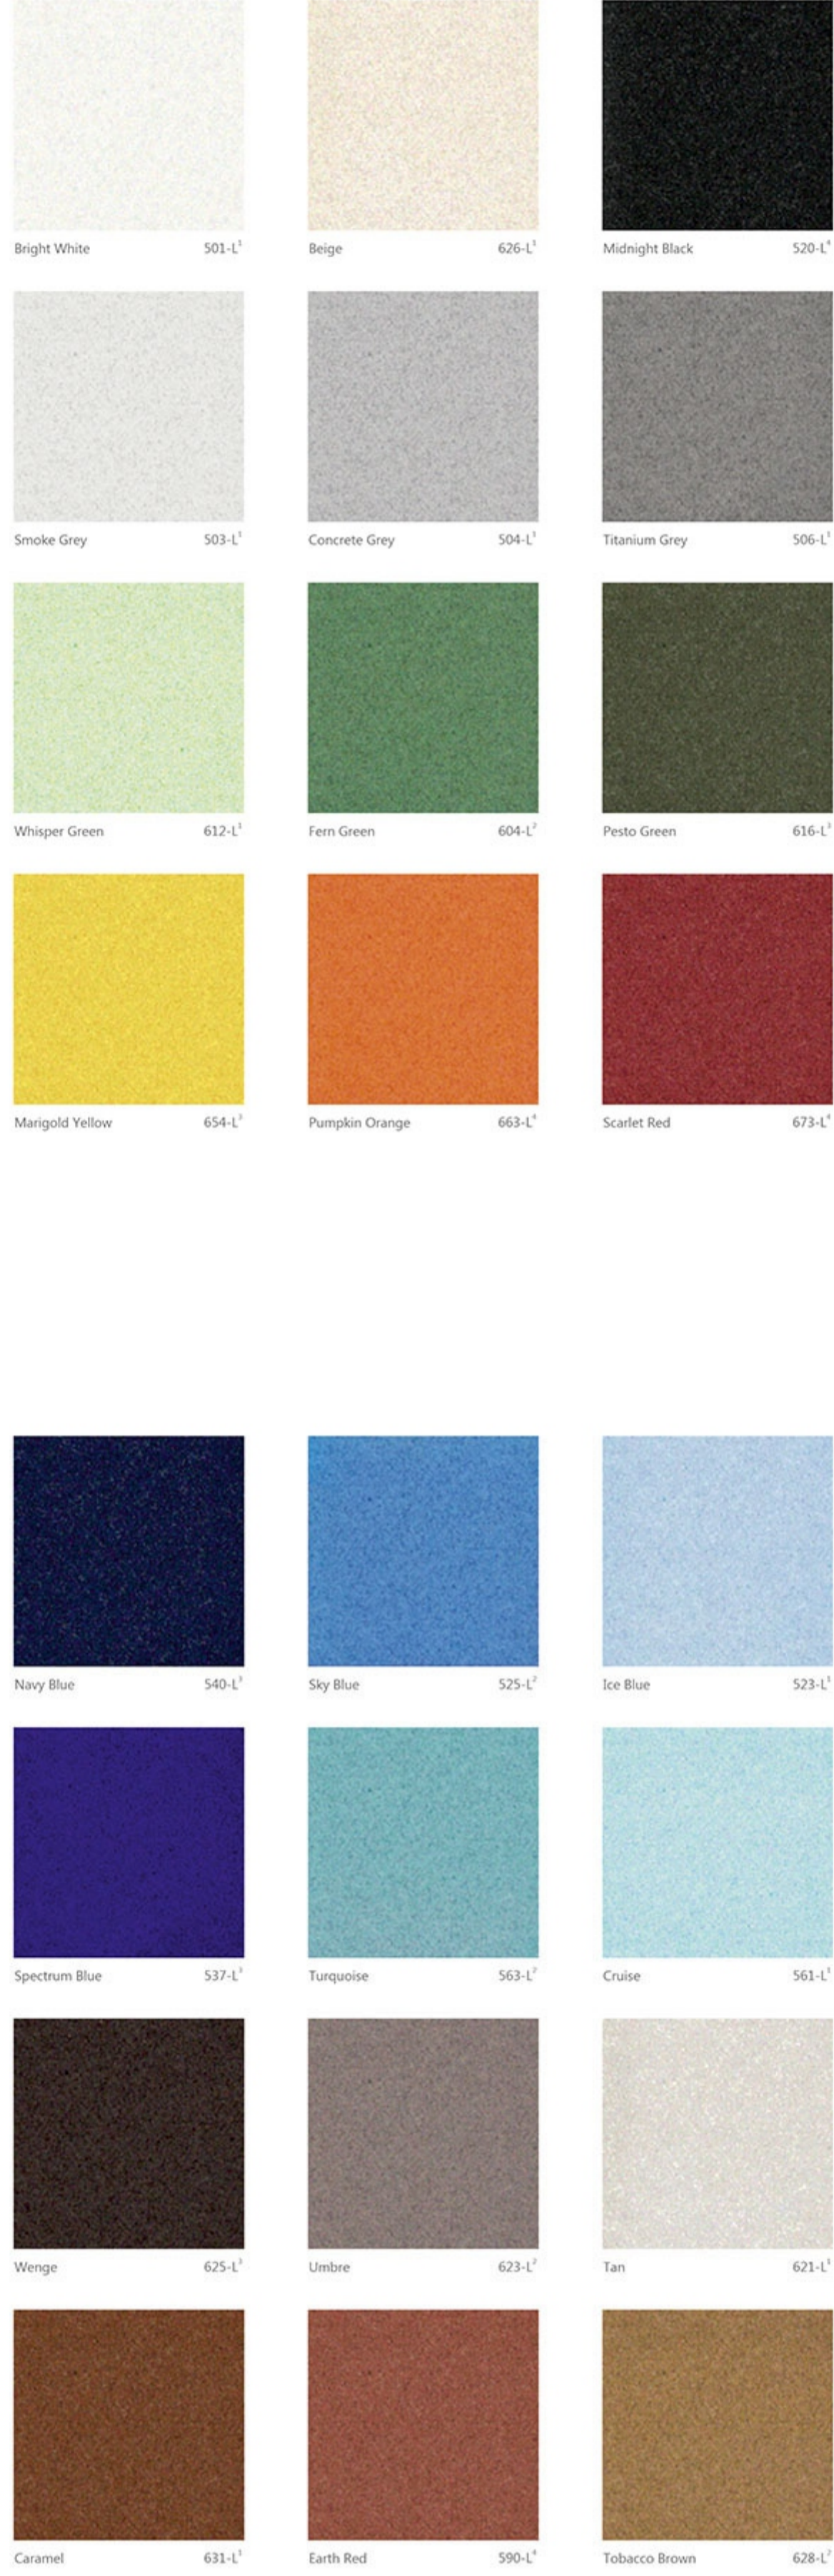

COLOUR AVAILABILITY

| Linen Grip effect | | | | | | |
|----------------------|--|--------------------|-------------------|----------------|---------------|------------------|
| Colour Code | | 2.5x2.5 cm Aligned | 2.5x2.5 cm Offset | 5x5 cm Aligned | 5x5 cm Offset | 10x10 cm Aligned |
| 501 - L ¹ | | ● | ● | ● | ● | ● |
| 503 - L ¹ | | ● | ● | ● | ● | ● |
| 504 - L ¹ | | ● | ● | ● | ● | ● |
| 506 - L ¹ | | ● | ● | ● | ● | ● |
| 520 - L ⁴ | | ● | ● | ● | ● | ● |
| 523 - L ¹ | | | | ● | ● | |
| 525 - L ² | | | | ● | ● | |
| 537 - L ³ | | | | ● | ● | |
| 540 - L ³ | | | | ● | ● | |
| 561 - L ¹ | | | | ● | ● | |
| 563 - L ² | | ● | ● | ● | ● | ● |
| 590 - L ⁴ | | | | ● | ● | |
| 604 - L ² | | | | ● | ● | |
| 612 - L ¹ | | | | ● | ● | |
| 616 - L ³ | | | | ● | ● | |
| 621 - L ¹ | | | | ● | ● | |
| 623 - L ² | | | | ● | ● | |
| 625 - L ³ | | | | ● | ● | |
| 626 - L ¹ | | | | ● | ● | |
| 628 - L ² | | | | ● | ● | |
| 631 - L ¹ | | | | ● | ● | |
| 654 - L ³ | | | | ● | ● | |
| 663 - L ⁴ | | | | ● | ● | |
| 673 - L ⁴ | | | | ● | ● | |

Elegance, Functionality & Freedom of design

PICCOLO porcelain mosaics are a cultivation of a feeling, creation of expectation & excitement, a promise of quality & service-an emotional response to architectural needs with different looks and colours.

PICCOLO gives you the flexibility to select, mix and merge - items, techniques, sizes, looks and colours. Such combinations create infinite and unique design possibilities to suit your taste and ambience.

Through PICCOLO range, designers have freedom to explore 1000+ options with numerous sizes, looks and colours.

KEY FEATURES

| | | | | | | | | |
|--|--|-------------------------------------|------------------------------------|-------------------------------------|------------------------------------|-------------------------------------|----------------------------------|-----------------------------------|
| <p>DURABILITY</p> <p>≤0.5 % water absorption</p> | <p>STRENGTH</p> <p>8 mm thickness for better strength</p> | | | | | | | |
| <p>LOOKS</p> <table border="0"> <tr> <td> S Silk Satin effect</td> <td> V Velvet Gloss effect</td> <td> C Crepe Crackle effect</td> <td> M Moire Cloudy effect</td> <td> D Denim Shading effect</td> <td> L Linen Grip effect</td> <td> B Batik Print effect</td> </tr> </table> | | S Silk Satin effect | V Velvet Gloss effect | C Crepe Crackle effect | M Moire Cloudy effect | D Denim Shading effect | L Linen Grip effect | B Batik Print effect |
| S Silk Satin effect | V Velvet Gloss effect | C Crepe Crackle effect | M Moire Cloudy effect | D Denim Shading effect | L Linen Grip effect | B Batik Print effect | | |
| <p>COLOURS</p> | | | | | | | | |
| <p>SAFETY</p> <p>Grip on floor for better grip</p> | <p>ADAPTABILITY</p> <p>Easy to fix on curved surfaces</p> | | | | | | | |
| <p>MOSAIC ACCESSORIES</p> <p>For better finish.</p> | <p>INNOVATIVE ASSEMBLING</p> <p>State-of-the-art Polyurethane link assembling through Robot</p> | | | | | | | |

TECHNICAL CHARACTERISTICS & TEST DATA

| | | | |
|--|--|-------------------|-----------|
| | DYNAMIC COEFFICIENT OF FRICTION | ANSI A326.3 | ≥ 0.42 |
| | WATER ABSORPTION | ISO 10545-3 | ≤ 0.5% |
| | BREAKING STRENGTH | ISO 10545-4 | Passes |
| | MODULUS OF RUPTURE | ISO 10545-4 | Passes |
| | RESISTANCE TO GLAZE ABRASION | ISO 10545-7 | Resistant |
| | RESISTANCE TO THERMAL SHOCK | ISO 10545-9 | Resistant |
| | RESISTANCE TO GLAZE CRACKING | ISO 10545-11 | Resistant |
| | RESISTANT TO FROST | ISO 10545-12 | Resistant |
| | RESISTANCE TO CHEMICAL ATTACK | ISO 10545-13 | Resistant |
| | RESISTANCE TO STAIN | ISO 10545-14 | Resistant |
| | LIGHT AND COLOUR FASTNESS | DIN 51094 / SS301 | Passes |

Mosaic colours shown here are purely indicative, tonal variation is an inherent characteristics of high temperature fired product.

